

# 6. GARAGE JACKS & MULTI PRESS



## GARAGE JACK

KP-5000



Auto Air

KP-3000



KF-10000



Manual

KF- 5000



KF-3000



### Specification

| Model            | KP-5000                  | KP-3000                  |
|------------------|--------------------------|--------------------------|
| Capacity         | 5 ton                    | 3 ton                    |
| Min height       | 110 mm                   | 150 mm                   |
| Max height       | 490 mm                   | 510 mm                   |
| Frame length     | 1,150 mm                 | 1,030 mm                 |
| Height           | 1,330 mm                 | 1,330 mm                 |
| Width            | 300 mm                   | 280 mm                   |
| Air pressure     | 8~10 kgf/cm <sup>2</sup> | 8~10 kgf/cm <sup>2</sup> |
| Length of handle | 1,250 mm                 | 900 mm                   |
| Weight           | 89 kg                    | 77 kg                    |

| Model         | KF-10000 | KF-5000 | KF-3000  |
|---------------|----------|---------|----------|
| Capacity(ton) | 10 ton   | 5 ton   | 3 ton    |
| Height        | 1,380 mm | 410 mm  | 1,350 mm |
| Max height    | 560 mm   | 560 mm  | 800 mm   |
| Min height    | 160 mm   | 150 mm  | 140 mm   |
| Weight        | 133 kg   | 95 kg   | 65 kg    |

## ENGINE CRANE

KE 8800(A)



Rotation

KE-8800



Fixed

| Model         | KE-8800(A)          | KE-8800  |
|---------------|---------------------|----------|
| Capacity(ton) | 2 ton               | 2 ton    |
| Length        | 1,330 mm            | 1,190 mm |
| Min height    | 850 mm              | 850 mm   |
| Max height    | 2,700 mm            | 2,700 mm |
| Operating     | 2 level handle pump |          |

## AIR HYDRAULIC JACK

KK-8863



3 stage

KK-8870



2 stage

KK-8871



2 stage

| Model           | KK-8863                    | KK-8870                    | KK-8871                    |
|-----------------|----------------------------|----------------------------|----------------------------|
| Capacity        | 65 / 35 / 18t              | 60 / 30t                   | 40 / 20t                   |
| Length          | 780 mm                     | 520 mm                     | 550 mm                     |
| Width           | 210 mm                     | 220 mm                     | 200 mm                     |
| Min height      | 155 mm                     | 185 mm                     | 175 mm                     |
| Max height      | 335 mm                     | 355 mm                     | 345 mm                     |
| Travel distance | 180 mm                     | 170 mm                     | 170 mm                     |
| Air pressure    | 8 ~ 10 kgf/cm <sup>2</sup> | 8 ~ 10 kgf/cm <sup>2</sup> | 8 ~ 10 kgf/cm <sup>2</sup> |
| Weight          | 66 kg                      | 61 kg                      | 51 kg                      |

## TRANSMISSION JACK

KB-8000



Air/Hydraulic

KB-8700



Hydraulic

KB-8900



Hydraulic


KB-9100



| Model      | Unit | KB-8000 | KB-8700 | KB-8900 | KB-9100 |
|------------|------|---------|---------|---------|---------|
| Capacity   | Ton  | 0.8     | 0.5     | 1.5     | 2       |
| Min height | mm   | 850     | 850     | 195     | 200     |
| Max height | mm   | 1,800   | 1,700   | 840     | 840     |
| Weight     | kg   | 76      | 68      | 104     | 145     |

The manufacture reserves the right to change the product specifications without notice and liability in order to upgrade the quality.

## MULTI PRESS / KING PIN PRESS

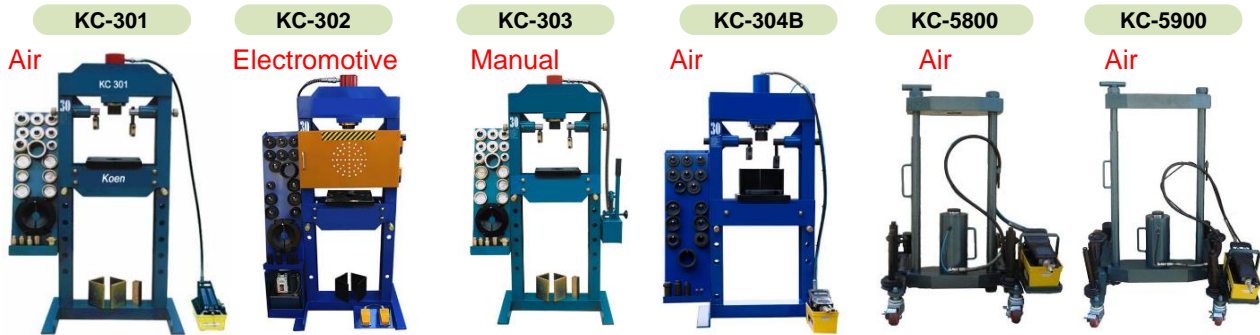

### Specification

| Model             | KC-301                   | KC-302                   | KC-303                   | KC-304                   | KC-5800                  | KC-5900                  |
|-------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Length(mm)        | 600                      | 600                      | 600                      | 600                      | 620                      | 730                      |
| Width(mm)         | 960                      | 960                      | 960                      | 960                      | 720                      | 840                      |
| Height(mm)        | 1,600                    | 1,600                    | 1,600                    | 1,420                    | 920                      | 1,040                    |
| Max Capacity(ton) | 30 ton                   | 30 ton                   | 30 ton                   | 30 ton                   | 50 ton                   | 50 ton                   |
| Air Capacity(K)   | 8~10 kgf/cm <sup>2</sup> | 8~10 kgf/cm <sup>2</sup> | 8~10 kgf/cm <sup>2</sup> | 8~10 kgf/cm <sup>2</sup> | 8~10 kgf/cm <sup>2</sup> | 8~10 kgf/cm <sup>2</sup> |
| Weight(kg)        | 233                      | 249                      | 233                      | 210                      |                          |                          |

## FRAME JACK



### Specification

| Model           | KR-30000                 | KR-22000                 | KR-20000                 | KR-15000                 | KR-7000                  |
|-----------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Capacity        | 30 ton                   | 22 ton                   | 20 ton                   | 15 ton                   | 7 ton                    |
| Width           | 830 mm                   | 830 mm                   | 830 mm                   | 830 mm                   | 700 mm                   |
| Length          | 1,850 mm                 | 1,850 mm                 | 1,850 mm                 | 1,850 mm                 | 1,750 mm                 |
| Height          | 1400 mm                  | 1,400 mm                 | 1,340 mm                 | 1,340 mm                 | 1,200 mm                 |
| Max Height      | 1000 + 180 mm            | 1000 + 180 mm            | 1000 + 180 mm            | 1000 + 180 mm            | 900 + 180 mm             |
| Min Height      | 320 mm                   | 320 mm                   | 320 mm                   | 320 mm                   | 260 mm                   |
| Cylinder stroke | 1020mm x 2ea             | 860 x 2ea                | 1020 mm                  | 1000 + 180 mm            | 900 + 180 mm             |
| Air pressure    | 8~10 kgf/cm <sup>2</sup> | 8~10 kgf/cm <sup>2</sup> | 8~10 kgf/cm <sup>2</sup> | 8~10 kgf/cm <sup>2</sup> | 8~10 kgf/cm <sup>2</sup> |
| Weight          | 463 kg                   | 433 kg                   | 351 kg                   | 336 kg                   | 241 kg                   |

The manufacture reserves the right to change the product specifications without notice and liability in order to upgrade the quality.